



Ref No	71WM-EEE-15-009A
Rev	2
Date	22-Aug-16

## PRODUCT DATA SHEET

General Information	
Model	EEF-9s
Stock Code	71WM-EEE-15-009A
Manufactured to	BS EN 3
Brand	EVERSAFE



Operating Data	
Class Fire Rating	A,B + ELECTRICAL
Fire Rating	21A:183B
Temperature	+5°C to +60°C

Performance	
Discharge Time (approx)	57 sec
Effective Range (approx)	6M
Discharge %	> 90%

Design Features	
Extinguishing Agent	Foam
Agent Weight	9.0 LT
Full Weight Approx	13.8 kg
Overall Height	625mm
Cylinder OD	178mm
Working Pressure	12 bar
Test Pressure	25 bar
Burst Pressure	exceed 69 bar
Type	Stored Pressure
Propellant	Nitrogen (N <sub>2</sub> ) + He (Tracer)
Neck Ring	Mild Steel
Cylinder Material	Mild Steel
Paint Finishing	Epoxy Polyester Powder Paint Coating Flame Red RAL 3000
Labelling	Silkscreen

Inspection & Test	
Raw Material	Batch Sampling Inspection/Test
Dimension/Workmanship	Batch Sampling Inspection
Paint Test	Batch Sampling Test
Final Inspection	Batch Sampling Inspection
Pre-Delivery Inspection	Batch Sampling Inspection
Burst Test	Batch Sampling Test
Performance Dis Test	Batch Sampling Test
Pressure Test 25 bar	100%
Leakage Test	100%

Approval	
Kitemark, BS EN3	
PED 97/23/EC, as amended	
MED 96/98/EC, as amended	

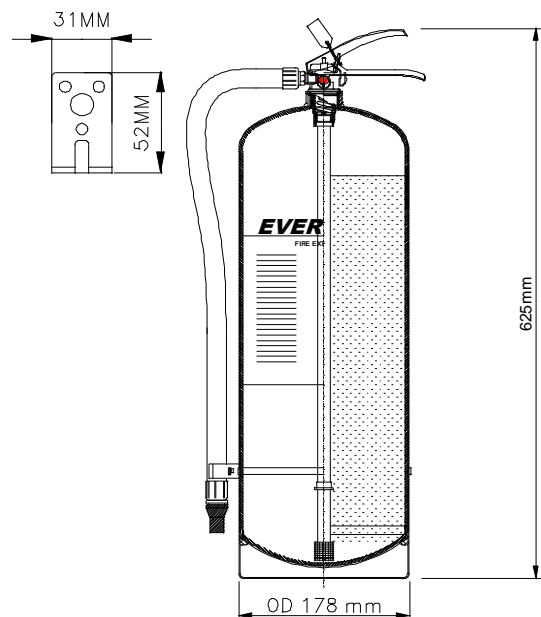

0029



KM 61549



0038